Recharging

The 120-volt charger draws approximately 12 amps. Make sure to use a dedicated and properly grounded circuit that can supply 12 amps continuously. Have an electrician inspect the outlet you are using to see if it meets these criteria.

Charger Levels

Recharging time varies based on the "level" of the charger. A level-1 charger uses household current (110 volts). A level-2 charger, sometimes call a quick charger, uses a special high-capacity circuit of 220 volts or more. Level-2 recharging is faster than level-1 recharging.

Check these items before charging your vehicle:

Safety Checklist

- Make sure you plug the charging cable directly into the wall outlet dedicated to vehicle charging. Do not use extension cords, adaptors, or multi-outlet plugs between the charging cable and the outlet. Make sure the charging cable is fully uncoiled before use.
- Make sure the control box, charge connector, and charging cable are free
- from any damage, including cracks or frays. If you find any damage to the devices, contact an authorized Honda Clarity Electric dealer. Make sure the charge connector and inlet are clean. If you find any
- contamination or foreign object in the connector or inlet, contact an authorized Honda Clarity Electric dealer. Make sure the charging cable is dry. Check that there is no water in the immediate area and that your hands are dry.
- **△**WARNING

Using a 120 volt wall outlet that is rated less than 12 amps or one that is

powering other devices can cause a fire, seriously injuring you or others. When using the 120-volt charger, use a dedicated and properly grounded

circuit rated 12 amps or more. Consult an electrician if you are not sure.

Put the transmission into P and set

How to Recharge (Level 1)

- the power mode to OFF. 2. Press and hold the charge lid release button.

The charging cable is stored in

a bag in the trunk. Prepare the


charging cable and open the



do not tie or coil the cable. 2. Insert the plug into a 120-volt wall

outlet completely until it stops.

the control box comes on.

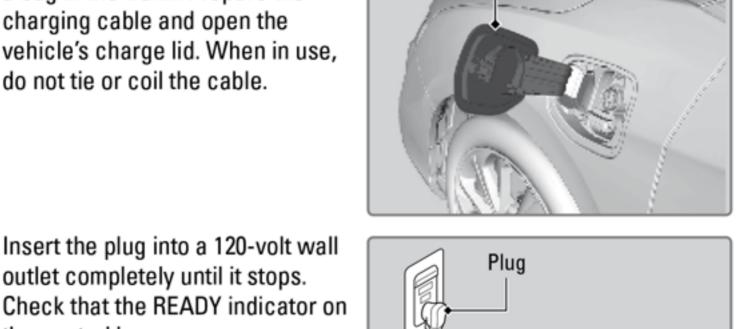


Remove the cover from the

charge connector. Align and

insert the charge connector into


the vehicle's inlet until you hear

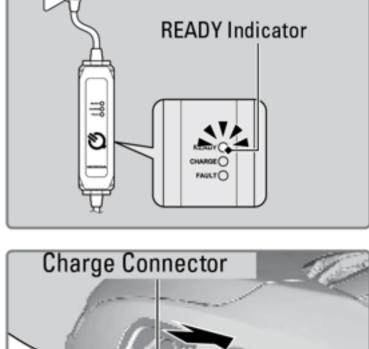

a click. The charge indicator stops blinking, and stays on when charging starts.

seriously injuring you or others.

outlet.

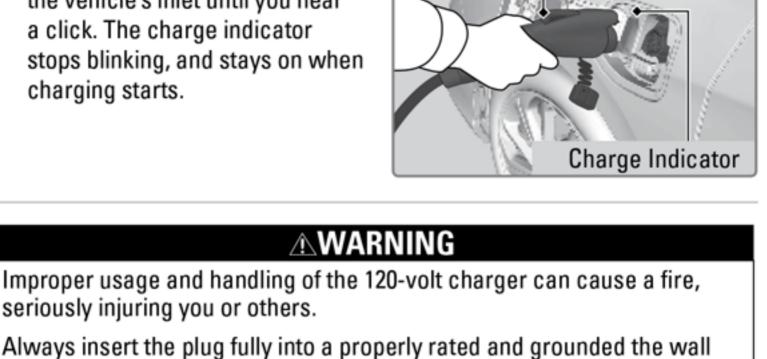

Plug the charging cable directly to the wall outlet. Do not use extension cords or multi-plug adapters.

Prevent the vehicle charge connector from becoming contaminated. Clean if necessary.

How to Recharge (Level 2 or Combo) 1. Stop your vehicle at a station

with the charge lid closest to the charge plug, just in front of the

release button. 4. Open the charge lid. In case of using with COMBO charge connector, open the charge lid and remove the inlet cover.

2. Put the transmission into P and

turn off the power system.

3. Press and hold the charge lid

specific for electric vehicles. Park

driver's door.

Charge Lid Charge Connector

Lid Open Button


connector until it clicks to the charge lid. The charge indicator on the charge lid stays on.

When Charging is Complete

Press the release button on the


To connect the cable to the

vehicle, push the cable's charge

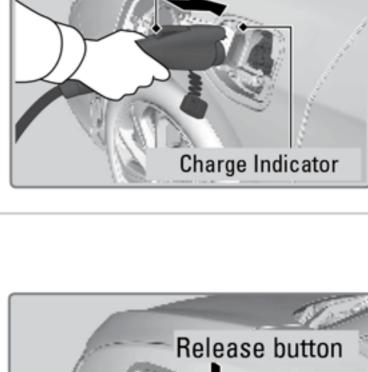

charge connector to release it from

the inlet. If you removed the inlet cover, make sure to put the cover back on the inlet before you close the lid. The charge indicator goes off once charging is complete.

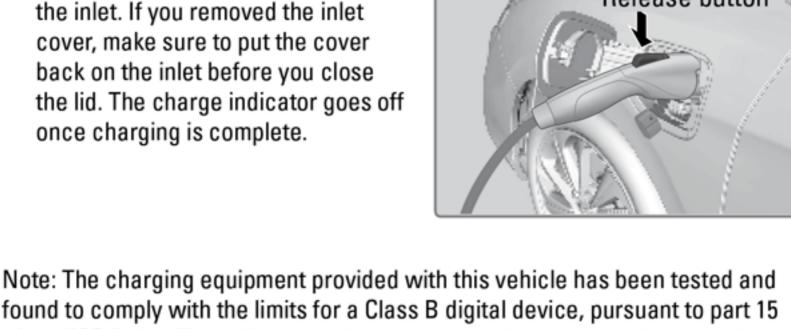

found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if

not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Improving Energy Efficiency

Achieving energy efficiency is dependent on several factors, including driving conditions, load weight, standby time, driving habits, and vehicle condition. Depending on these and other factors, you may not achieve the rated driving range of this vehicle.