

Refueling

Use the proper fuel and refueling procedure to ensure the best performance and safety of your vehicle.

Fuel Information

Use of unleaded gasoline of 87 octane or higher is recommended.

- Honda recommends TOP TIER Detergent Gasoline where available.
- Do NOT use gasoline containing more than 15% ethanol.
- Do NOT use gasoline containing methanol.
- Do NOT use gasoline containing MMT.

NOTICE

We recommend quality gasoline containing detergent additives that help prevent fuel system and engine deposits. In addition, in order to maintain good performance, fuel economy, and emissions control, we strongly recommend the use of gasoline that does NOT contain harmful manganese-based fuel additives such as MMT, if such gasoline is available.


How to Refuel

1. Stop your vehicle with the service station pump on the left side of the vehicle in the rear.
2. Put the transmission into Park (P).
3. Turn the power system off.
4. Press the fuel door release button.


Please Wait appears for a few seconds on the driver information interface.

5. When the message changes to **Ready**, the fuel door automatically opens.


You can now unscrew the fuel cap and start refueling.

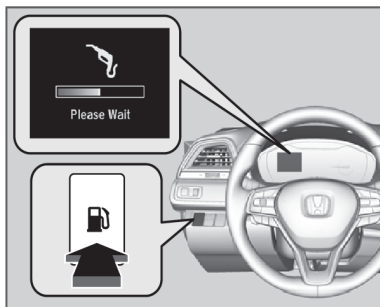

6. Remove the fuel cap slowly. If you hear a release of air, wait until it stops, then proceed to slowly open and remove the fuel fill cap.

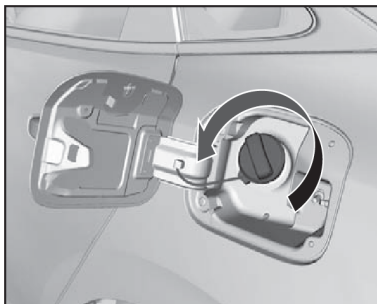

7. Place the fuel fill cap in the holder.
8. Insert the fuel filler nozzle fully. When the tank is full, the filler nozzle will click off automatically. This leaves space in the fuel tank in case the fuel expands with a change in the temperature.
9. After filling, replace the fuel fill cap, tightening it until you hear it click at least once.

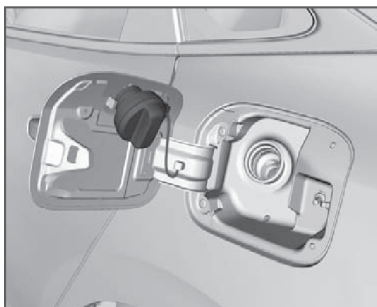

Shut the fuel fill door by hand.

⚠ WARNING

Gasoline is highly flammable and explosive.

You can be burned or seriously injured when handling fuel.

- Turn off the power system, and keep heat, sparks, and flame away.
- Handle fuel only outdoors.
- Wipe up spills immediately.