


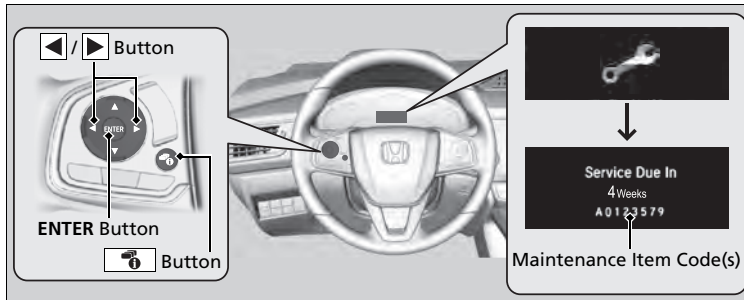


If the vehicle has maintenance items due within 30 days, you will see the Maintenance Minder messages appear on the driver information interface every time you set the power mode to ON. The messages notify you when to bring your vehicle to an authorized Honda Clarity Fuel Cell dealer for indicated maintenance services.

To Use Maintenance Minder™

■ Displaying the Maintenance Minder Information

1. Set the power mode to ON.
2. Press the  (display/ information) button.
3. Press the  button to select the  icon, and press the **ENTER** button.




▣ Displaying the Maintenance Minder Information

Based on the vehicle operation hours, remaining ion exchanger life is calculated.

There is a list of maintenance service items you can view on the driver information interface.

Maintenance Service Items

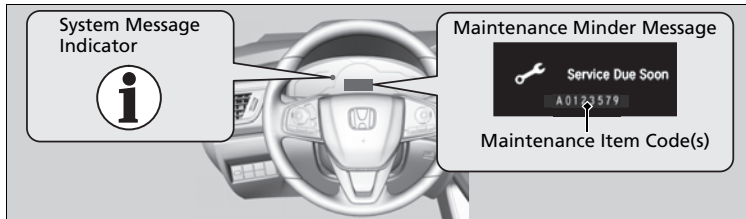

Maintenance Service Items

- At each maintenance interval, check Fuel Cell Insulating Fluid level and top up (to “Max” fill line) with “Fuel Cell Insulating Fluid - 20% prediluted formulation”
- Replace hydrogen ventilation duct and drain, hydrogen tank every 15 years without the maintenance minder.

CODE	Maintenance Items
A	<ul style="list-style-type: none"> • Replace ion exchange filter
0	<ul style="list-style-type: none"> • Inspect front and rear brakes • Check expiry date for Temporary Tire Repair Kit • Inspect these items: <ul style="list-style-type: none"> • Tie rod ends, steering gear box, and boots • Suspension components • Driveshaft boots • Brake hoses and lines (including ABS/VSA®) • All fluid levels and condition of fluids • Stay RR, RR Subframe • Exhaust Diluter
1	<ul style="list-style-type: none"> • Rotate tires
2	<ul style="list-style-type: none"> • Replace dust and pollen filter*¹
3	<ul style="list-style-type: none"> • Replace transmission fluid*²
5	<ul style="list-style-type: none"> • Replace Fuel Cell Insulating Fluid - 50% prediluted formulation*³

CODE	Maintenance Items
7	<ul style="list-style-type: none"> • Replace brake fluid*⁴ • Replace air cleaner element*⁴
9	<ul style="list-style-type: none"> • Inspect these items: <ul style="list-style-type: none"> • Hydrogen tank • Hydrogen ventilation duct and drain • Exhaust system • Fuel lines and connections

*1: If you drive primarily in urban areas that have high concentrations of soot in the air from industry and from diesel-powered vehicles, replace the dust and pollen filter every 15,000 miles.

*2: Driving in mountainous areas at very low vehicle speeds results in higher transmission temperatures. This requires transmission fluid changes more frequently than recommended by the Maintenance Minder. If you regularly drive your vehicle under these conditions, have the transmission fluid changed every 31,250 miles.


*3: If a Maintenance Minder message does not appear more than 12 year after the display for item 5 is reset, change Fuel Cell Insulating Fluid with “Fuel Cell Insulating Fluid - 50% prediluted formulation” every 12 years.





*4: If a Maintenance Minder message does not appear more than 3 years after the display for item 7 is reset, change the brake fluid and replace air cleaner element every 3 years.

Resetting the Display

Reset the maintenance minder information display if you have performed the maintenance service.

Have an authorized Honda Clarity Fuel Cell dealer reset the maintenance item code for ion exchanger replacement as it is not possible to do this on your own.

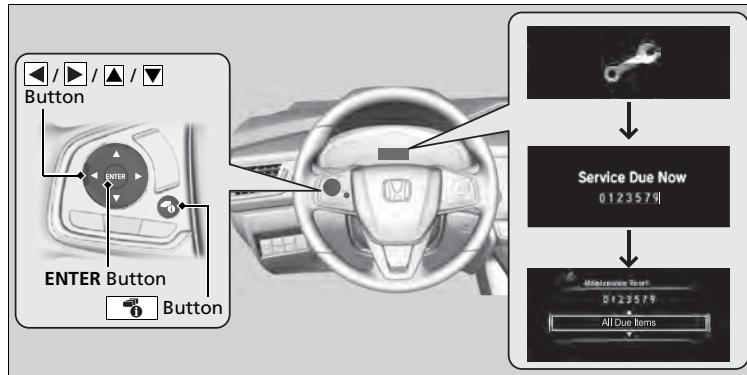

1. Set the power mode to ON.
2. Press the  (display/information) button.
3. Press the  button to select the  icon, and press the **ENTER** button.
4. Press and hold the **ENTER** button for about 10 seconds to enter the reset mode.
5. Press  to select a maintenance item to reset, or to select **All Due Items** (You can also select **Cancel** to end the process).
6. Press the **ENTER** button to reset the selected item.
7. Repeat from step 4 for other items you wish to reset.

Resetting the Display

NOTICE

Failure to reset the Maintenance Minder™ display after a maintenance service results in the system showing incorrect maintenance intervals, which can lead to serious mechanical problems.

The authorized Honda Clarity Fuel Cell dealer will reset the Maintenance Minder™ display after completing the required maintenance service. If someone other than an authorized Honda Clarity Fuel Cell dealer performs maintenance service, reset the Maintenance Minder™ display yourself.

You can also reset the Maintenance Minder™ display using the audio/information touch screen.