

Bluetooth® HandsFreeLink®

Bluetooth® HandsFreeLink® (Navi models)

HFL uses Bluetooth technology to link your cell phone to your vehicle. With HFL, you can place and receive calls through your vehicle's system, without the distraction of handling your cell phone. To use this feature, all you need is a Bluetooth-compatible cell phone (with the Hands-Free Profile). For more information, call (888) 528-7876 or visit www.handsfreelink.com.

HFL Talk button:

Activates the HFL system (audio system mutes). Press and release the HFL Talk button, wait for a beep, then give a voice command in a clear, natural speaking voice (without pause). If a voice command is not given within 3 seconds, the system times out (two beeps).

HFL Back button: Use to end a call, to go back to the previous command, or to cancel an operation.

Tip: *The maximum range between your phone and the vehicle is 30 feet (10 meters).*


Note: *Phone reception when using HFL depends entirely on your cell phone reception and service provider, not on the vehicle. Placing the phone in a metal case, briefcase, or purse can decrease performance.*

Using Voice Control

- Always enter a command after a beep.
- Make sure that the airflow from the A/C vents does not interfere with the system microphone in the ceiling console.
- Close all windows and the moonroof.
- If the microphone picks up voices other than yours or if you don't speak clearly, the system may not understand your command. Speak clearly and in a natural speaking voice.
- If the HFL does not recognize a command, its response is "Pardon, please repeat."
- To hear a list of available options at any time, press and release the HFL Talk button, wait for the beep, and say "HandsFree help."
- Many commands can be spoken together. For example, you can say "Dial 123-456-7891."
- To skip a voice prompt, press the HFL Talk button while HFL is speaking. HFL is then ready for your next command.
- To end a command sequence at any time, press and hold the HFL Back button, or press the HFL Talk button, wait for a beep and say "Cancel." The next time you press the HFL Talk button, the HFL begins from the main menu.

Bluetooth® HandsFreeLink®

Multi-Information Display (MID)

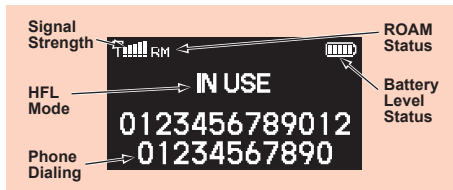

When operating HFL, the following symbols are displayed:

- **Signal Strength*** - Indicates the network signal strength of the current phone call. Five bars equals full strength.
- **ROAM Status*** - Indicates your phone is roaming.
- **Battery Level Status*** - Indicates the power remaining in your phone's current battery charge. Five bars equals full battery strength.
- **HFL Mode** - Indicates when you are dialing and receiving calls.
- **Phone Dialing** - Indicates the number you entered or the number of the incoming call.

* Some phones do not send this information to the HFL.

Setting Your Password

The Bluetooth HandsFreeLink system will accept a numeric, four-digit password that you can use for security purposes.

Pairing Your Phone

After confirming that your cell phone is a Bluetooth-compatible phone with the HandsFreeLink profile, see the HandsFreeLink section in the owner's manual for detailed instructions on pairing your phone. Pairing instructions can also be found by visiting www.handsfreelink.com or call (888) 528-7876.

Making a Call

You can make calls using a phone number, a name stored in your HFL phonebook, or redialing the last number called. You can talk up to 30 minutes after removing the key from the ignition switch. Remember to press the HFL Talk button prior to each command.

Note: HFL cannot dial a name stored in your cell phone.

You say: "Call/Dial"

HFL responds: "What name or number would you like to call/dial?"

You say: "123 456 7890."

HFL responds: "123 456 7890?"

You say: "Yes" or "Call/Dial"

HFL responds: "Calling/Dialing."

Tip: To redial the last number called, say "Redial" or press and hold the HFL Talk button.

Bluetooth® HandsFreeLink®

Receiving a Call

To answer a call, press the HFL Talk button. This button also switches the Call Waiting function on your phone. To decline the call, press the HFL Back button.

Transferring a Call

Press and release the HFL Talk button and wait for the beep, then say "Transfer." The audio switches from HFL to the phone.

Ending a Call

Press the HFL Back button.

Import Phonebook Feature (With Navigation)

You can store up to 1,000 names and 10,000 phone numbers in the HFL phonebook from your cellular phonebook. Using HFL, you can automatically dial any name or number in the phonebook. Not all phones have this capability. For more information, visit www.handsfreelink.com or call (888) 528-7876.

Using the Phonebook

The HFL phonebook can store up to 50 names and their associated numbers. These can be any type of numbers.

Tip: The HFL allows you to send numbers or names during a call. This is useful when you call a menu-driven phone system. You can also program account numbers into the HFL phonebook for easy retrieval during menu-driven calls. To activate this command, say "Send." After the HFL responds, say the designated name or number.

Note: For *, say "Star" and for #, say "Pound."

Phonebook Access

You say: "Phonebook"

HFL responds: "Phonebook options are store, edit, delete, received contact, and list."

Storing to the Phonebook

You say: "Store"

HFL responds: "What name would you like to store?"

You say: "Joe/Account number"

HFL responds: "What is the number for Joe/Account number?"

You say: "123 456 7891"

HFL responds: "123 456 7891. Say 'Enter,' or continue to add numbers."

You say: "Enter"

HFL responds: "Joe/Account number has been stored. Returning to the main menu."

Bluetooth® HandsFreeLink®

Editing the Phonebook

You say: "Edit"

HFL responds: "What name would you like to edit?"

You say: "Joe"

HFL responds: "What is the new number for Joe?"

You say: "987 654 3210"

HFL responds: "987 654 3210. Say 'Enter,' or continue to add numbers."

You say: "Enter"

HFL responds: "The number has been changed. Returning to the main menu."

Deleting from the Phonebook

You say: "Delete"

HFL responds: "What name would you like to delete?"

You say: "Joe"

HFL responds: "Would you like to delete Joe?"

You say: "Yes"

HFL responds: "The name has been deleted. Returning to the main menu."

Selecting from your Phonebook List

You say: "List"

HFL responds: "Joe...Tim...Lisa"

You say: "Call"

HFL responds: "Would you like to call Lisa?"

You say: "Yes"

HFL responds: "Calling"